




# Effective solutions for well-being, productivity, and increased vitality



Lighting is crucial for well-being, productivity, and increased vitality. This luminaire is designed as an efficient solution for excellent vision at work in clean rooms, laboratories, hospitals, medical centers, other healthcare facilities and certain production environments. The luminaire meets all applicable lighting standards and regulations for operating in highly hygienic facilities which require easy-to-clean, dust-free luminaires.



## FUNCTIONAL SPECIFICATIONS:

- 5-year full performance warranty
- Modular construction
- Energy efficiency
- Low UGR

## APPLICATION AREAS:


- Clean rooms
- Laboratories
- Hospitals
- Medical centers
- Other healthcare facilities




## TECHNICAL SPECIFICATIONS:

Parameter	
Power (W)	38 W
Light flux (lm)	4190 lm
CCT	4000 K
CRI	> 80
SDCM	3
Lifetime	L80B10 50,000 h
Input voltage	230 V/50 Hz
Power factor	0.96
UGR	< 19
Isolation class	Class I
IP Protection	IP 54
Dimensions	596 x 596 x 85, 622 x 622 x 85
Weight	5.5 kg
Color	RAL 9016
Materials	Steel sheet housing Cover: Microprismatic PMMA or tempered glass
Operating temperature range	-20 °C to +45 °C
Standard compliance	EN 60598-2-1:1989; EN 60598-1:2008+A11:2009; LED - EN 62031:2008+A1:2013; IEC/TR 62778:2012 or EN 62471:2008; CE

## DIMENSIONS:

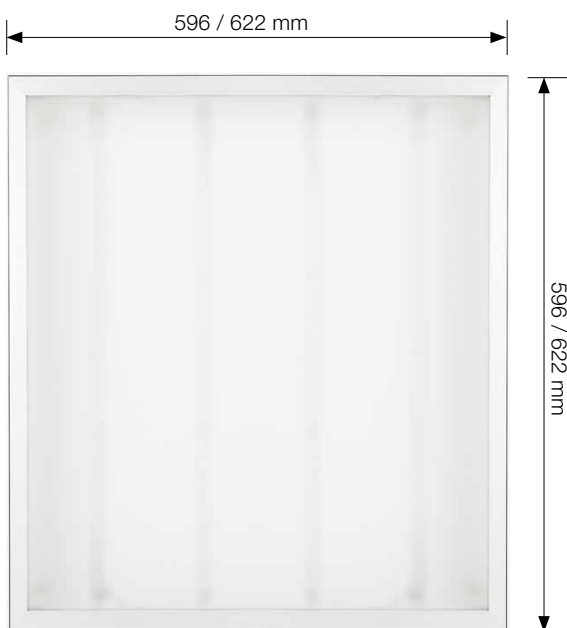

## OPTICS:

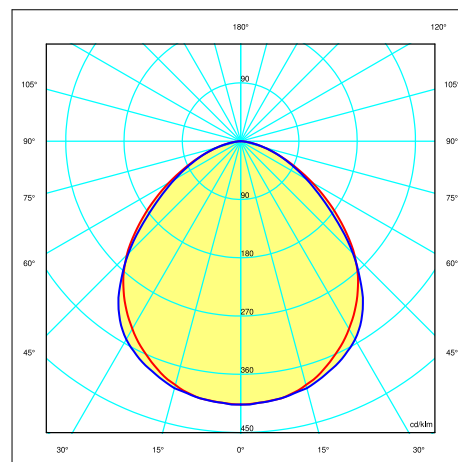

L  M E N I A